# ROTARY POTENTIOMETERS 8mm Type Micro Potentiometers








#### **♦** FEATURE

- · For small ideal, low-profile sets.
- Dual-unit type offers superior gang error characteristics
- · Single-unit control with detent and tap terminal available
- PC board thicknesses up to 1.6mm are available.

#### **APPLICATIONS**

- For volume controls and tone controls in compact products such as radio, radio-cassette recorder, micro cassette recorder, compact TV sets and CD-ROM.
- · For VCR tracking controls

#### **♦ PRODUCTS NUMBERING SYSTEM**

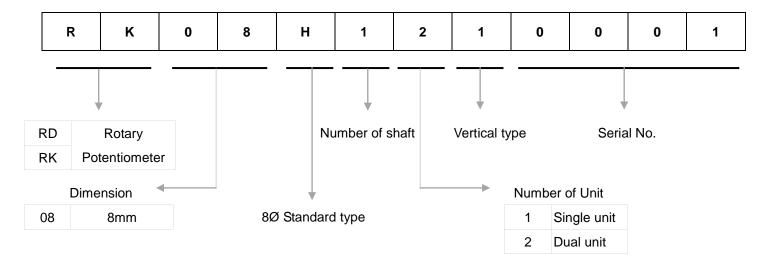

#### **♦** COMMON SPECIFICATIONS

Application	8mm size	
	Single-unit	Dual-unit
Total resistance (KΩ)	5 \ 10 \ 20 \ 50 \ 100 \ 250 \ 500	
Total resistance Tolerance	±30%	
Resistance taper	$A \cdot B \cdot C \cdot D$	
Power rating	0.03W	
Max operating Voltage	50V A.C	
Rotational angle	200±10°	
rating torque	10~100gf-cm	
Detent position	100±5°	-
Detent torque	10~100gf-cm	-
Rotational Life	10,000 cycles	10,000 cycles

## ROTARY POTENTIOMETERS

## **8mm Type Micro Potentiometers**



# ♦ STANDARD DIMENSION OF SHAFT AND PIN Shaft Dimension Pin Dimensions

