



# ◆ FEATURE

- 1.5mm travel
- 12.5mm in lever height from P.C.B
- · support 4 poles

# **♦** APPLICATIONS

- Audio system, TV, Mixer
- consumer electronics products, industrial electronic equipment.


## **♦** COMMON SPECIFICATIONS

| Items                       | Stand specification |
|-----------------------------|---------------------|
| Ratings                     | 0.1A 30V DC         |
| Operating life without load | 10,000 cycles       |
| Initial contact resistance  | $30m\Omega$ max.    |

# **♦** PRODUCTS LINE

| Poles | Position | Changeover timing | Terminal | Operating force | Operating | Travel (mm) | Total<br>travel<br>(mm) | Products No. | Drawing<br>No. |
|-------|----------|-------------------|----------|-----------------|-----------|-------------|-------------------------|--------------|----------------|
| 4     | 2        | Non-shorting      | Straight | 350±100gf       | Self-lock | 1.5         | 2.5                     | SFPE14MD03   | 1              |

# **♦ PUSH SWITCH PRODUCTS NUMBERING SYSTEM**

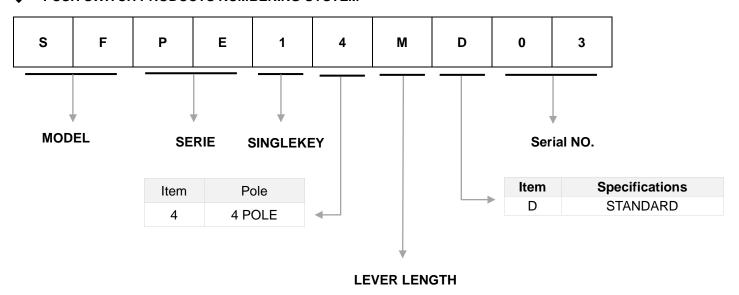



DIMENSION Unit: mm

