

PUSH SWITCH SPEC SERIES



◆ FEATURE

- 2.5mm travel
- 12.5mm in lever height from P.C.B
- support 2 poles and 4 poles

◆ APPLICATIONS

- Audio system,TV,Mixer
- consumer electronics products,industrial electronic equipments.


◆ COMMON SPECIFICATIONS.

Items	Stand specification
Ratings	0.1A 30V DC
Operating life without load	10,000 cycles
Initial contact resistance	30mΩ max.

◆ PRODUCTS LINE

Frame	Poles	Position	Changeover timing	Terminal	Operating force	Operating	Travel (mm)	Total travel (mm)	Products No.	Drawing No.
Without mounting hole	2	2	Non-shorting	Printed	200±100gf	Self lock	2.5	3.4	SPEC12HC01	1
	4				250±100gf	Non-lock			SPEC12HC04	2


◆ PUSH SWITCH PRODUCTS NUMBERING SYSTEM

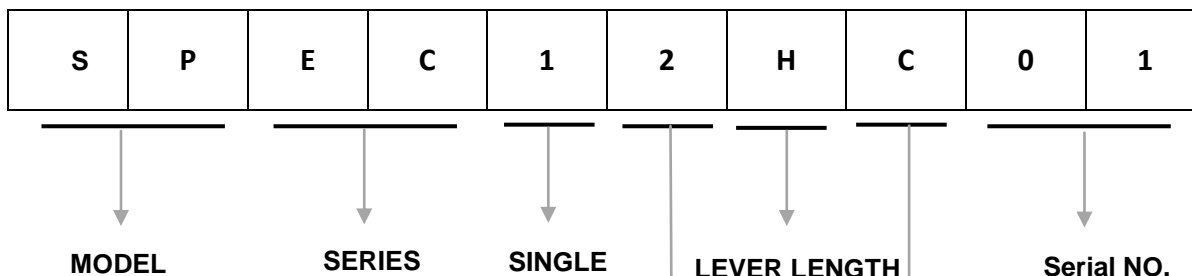

Item	Frame style
A	2-M3x0.5 WITH LEG
B	2-M3x0.5 NO LEG
C	NON-MOUNTING HOLE

KEY PITCH	
2	15mm

◆ COMMON SPECIFICATION

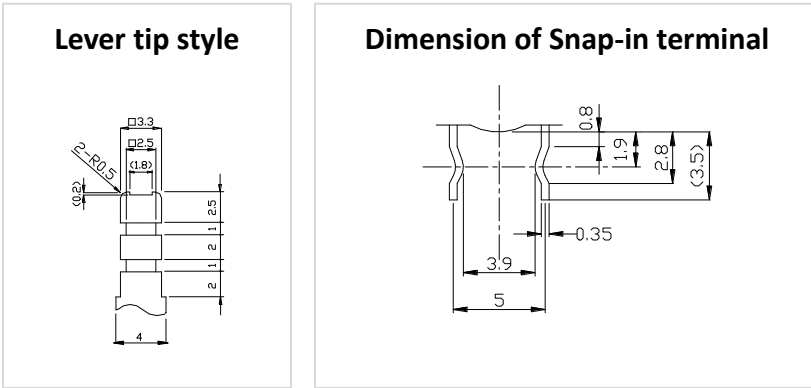

DIMENSION Unit : mm

No	Dimensions	Circuit diagram	
		Viewed from the direction A	P.C. board mounting hole dimensions (viewed from the direction A)
1			
2			