SLIDE SWITCH SSSU SERIES





FEATURE

- Medium-sized slide switch of metal-frame type.
- 3mm travel.
- 8.5mm in lever height from P.C.B
- Horizontal knob type with cover available-direct knob setting possible.

• COMMON SPECIFICATIONS

♦ APPLICATIONS

Switching of signals in VCRs, TV sets, radio cassette recorders, stereos, measuring instruments, vending machines, musical instrument, office machines, etc.

Items	Stand specification
Ratings	0.1A 30V DC (Resistive load)
Operating life without load	10,000 cycles
Initial contact resistance	25 mΩ max

PRODUCTS LINE


Vertical

Poles	Dolog	Position	Lever length	Frame		Mith cover	Without on or	Draduata Na	
	oles			Printed	Snap-in	With cover	Without cover	Products No.	Drawing No.
	1	2	6,9,12	•	•	•	•	•	SSSU012N
	2	2	6,9,12	•	•	•	•	•	SSSU022N

Horizontal

Delee	Position	Lever length	Frame		Mith cover		Dreducte No	
Poles			Printed	Snap-in	With cover	Without cover	Products No.	Drawing No.
1	2	6,9	•	•	•	•	•	SSSU112N
2	2	6,9	•	•	•	•	•	SSSU122N


SLIED SWITCH PRODUCTS NUMBERING SYSTEM

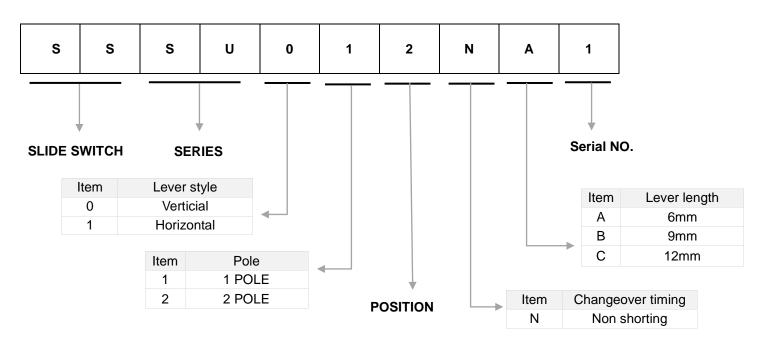

SLIDE SWITCH SSSU SERIES






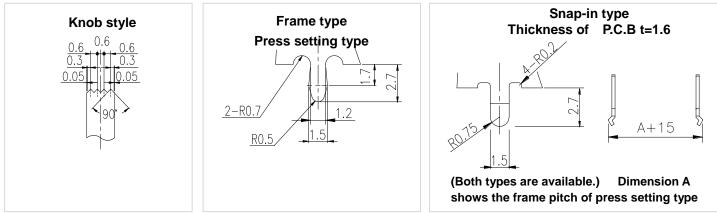


DIMENSION




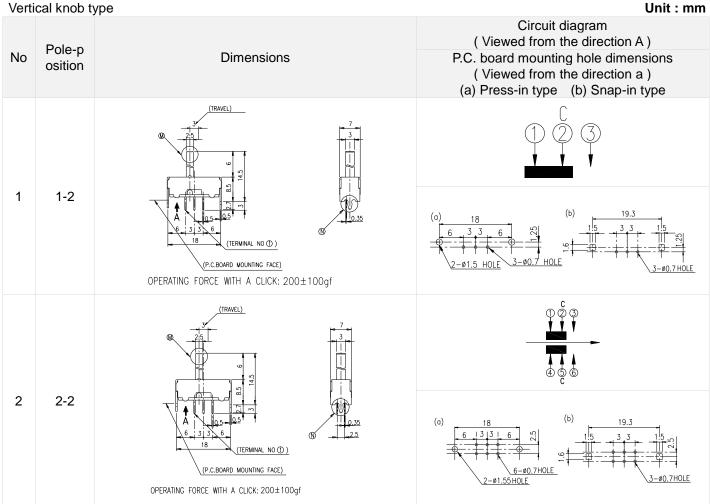

SLIDE SWITCH SSSU SERIES

♦ DIMENSION

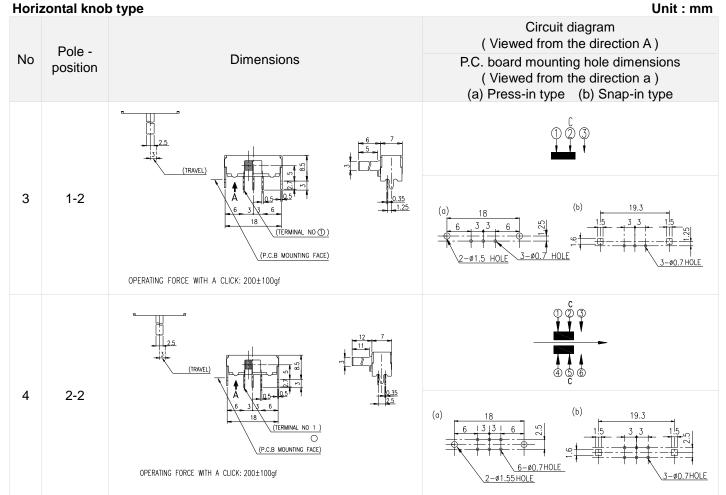

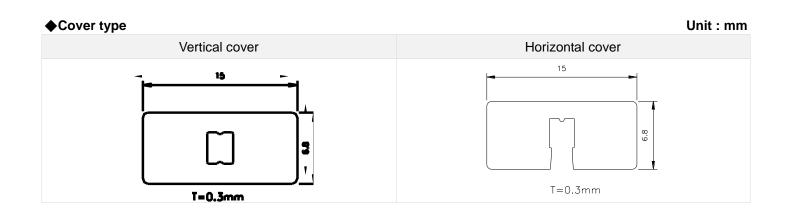

ORWARD ELECTRONIC