

ROTARY SWITCH

SRRN SERIES



◆ FEATURE

- Hermetically sealed, compact rotary switch.
- Excellent operating feel and environmental resistance.

◆ APPLICATIONS

- All types of electronic equipment, such as measuring instruments and control equipment.


◆ COMMON SPECIFICATIONS

Items		Stand specification
Ratings (max.) (Resistive load)		0.15A, 12V DC (resistive load)
Contract resistance	Initial performance	50mΩ max.
	after lifetime	100mΩ max.
Operating life	without load	10,000 cycles

◆ PRODUCTS LINE

Circuit	Poles	Position	Changeover timing	Step angle	Shaft style	Rotational torque	Products No.	Drawing No.
1	1	12	Non-shorting	30°	Flat 18-tooth serration Round with groove Round	0.7±0.3Kgf.cm	SRRN1C1N	1
	2	5				0.2±0.1Kgf.cm	SRRN152N	2

◆ ROTARY SWITCH PRODUCTS NUMBERING SYSTEM

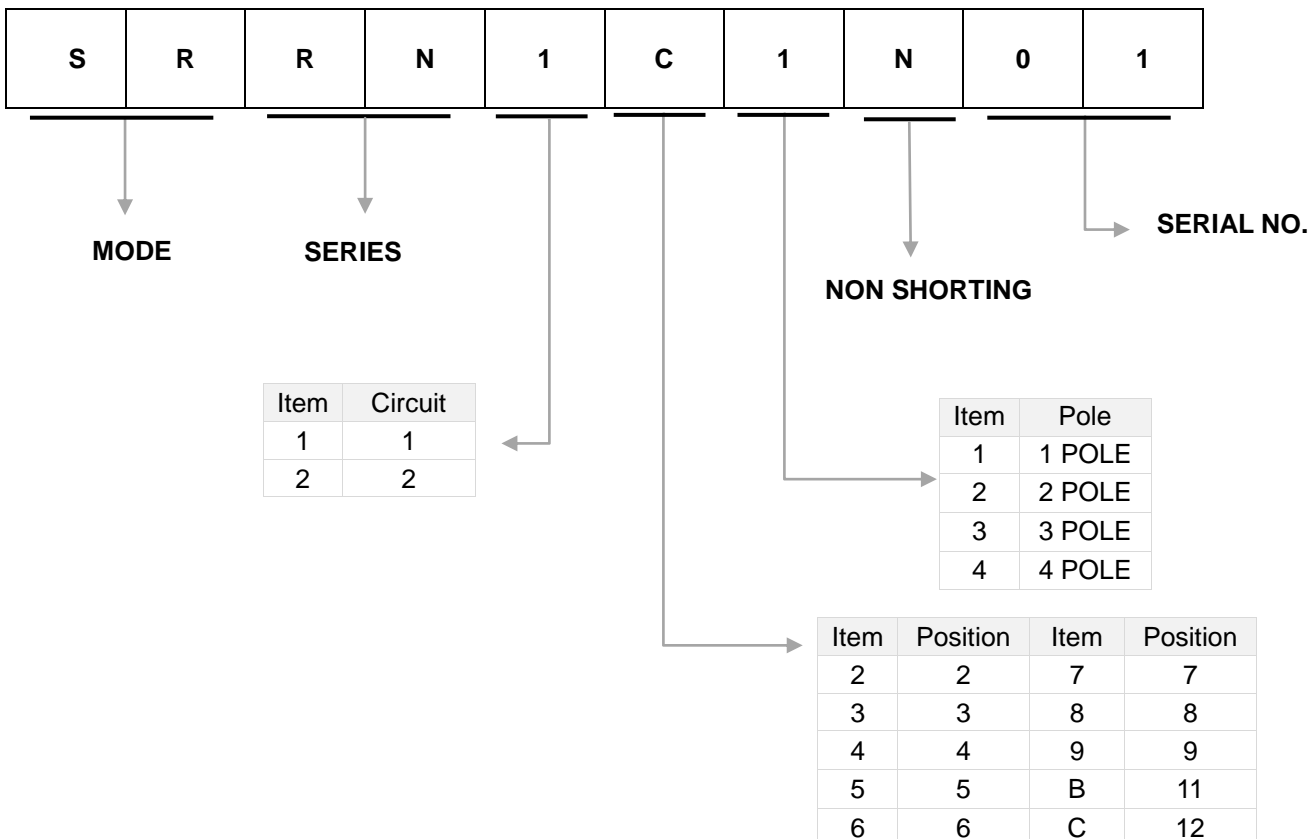

ROTARY SWITCH


SRRN SERIES

◆ COMMON SPECIFICATION

1. Dummy terminals

Number of positions	2 Pole		3 Pole		4 Pole	
	2	(17)(16)(14)(13)(8)(7)(5)(4)	(4)(5)(10)(11)(16)(17)	(17)(12)(8)(3)		
3	(17)(16)(14)(8)(7)(5)(4)	(5)(11)(17)	-			
4	(17)(16)(8)(7)	-	-			
5	(17)(8)	-	-			
6	-	-	-			

2. Terminal style

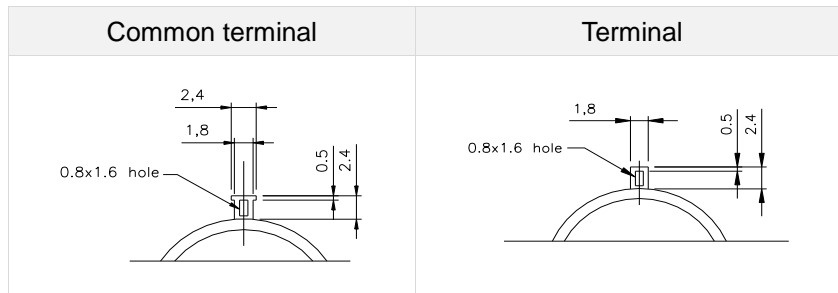

DIMENSION

Unit : mm

No	Dimensions	Circuit diagram (Viewed from the direction A)
1		
2		